




Visite la página TRAXXAS.com/manuals para descargar el instrucciones en su idioma.

Auf TRAXXAS.com/manuals können Sie anleitung in Ihrer Sprache downloaden.

## LED Light Kit High Beam/Low Beam Switch Installation Instructions

Covers Part #8037



### Kit Contents:

- High Beam/Low Beam Switch Assembly
- Zip ties (2)

### Tools required:

- 2.0mm hex wrench
- Side cutters (to trim zip ties)

### Installation of the High Beam/Low Beam Switch on the Vehicle Body:

1. Remove the 2.6x8mm button-head screws (2) from the driver side tailgate retainers (A). **Do not remove the retainers.**
2. Install the high beam/low beam switch on top of the retainers and secure with the 2.6x8mm button-head screws (B). **Do not overtighten the screws.**
3. Remove the zip ties (2) from the wiring harnesses (C).
4. Route the switch wiring harness to the distribution block. Secure all wiring to the body in the same locations with the included zip ties (2) (trim excess).
5. Remove the 2.6x8mm button-head screws to remove the distribution block from the mount (D).
6. Remove the green jumper plug from the distribution block (D).
7. Plug the switch wiring harness into the green port of the distribution block and reinstall the distribution block on the mount with the 2.6x8mm button-head screws (E).
8. Confirm all wires are routed properly.




### Operating the Switch:

With the body installed on the vehicle, move the switch to the “up” position to put the LED headlights in **High Beam Mode**. Move the switch to the “down” position to put the LED headlights in **Low Beam Mode**.

If you have questions or need technical assistance, call Traxxas at

**1-888-TRAXXAS**

(1-888-872-9927) (U.S. residents only)

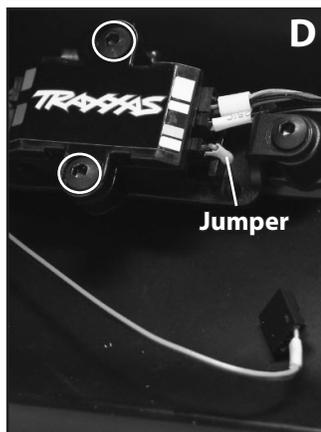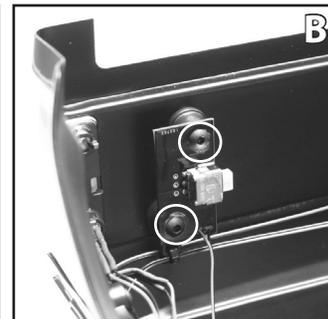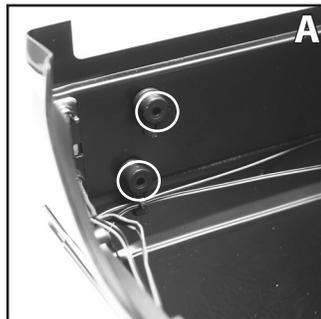

TRAXXAS.COM

Traxxas, 6250 Traxxas Way, McKinney, TX 75070, Phone: 972-549-3000, Fax: 972-549-3011, e-mail: support@Traxxas.com

HKC18052-R00 180724